

Fitting for 2 top-running wooden doors up to 15 kg (33 lbs.), with screwed on or groove mounted running track. Design Inslide.

Product highlights



Flexibility

Flexible, efficient assembly with single or double running tracks for screw fixing, gluing, or with swivel lugs



Productivity

Efficient thanks to tool-less door installation
as well as easy, intuitive adjustment

Technical specifications



Max. 15 kg (33 lbs.)




Max. 1400 mm (4'7 1/8")




Max. 1000 mm (3'3 3/8")



16–19 mm (5/8" to 3/4")

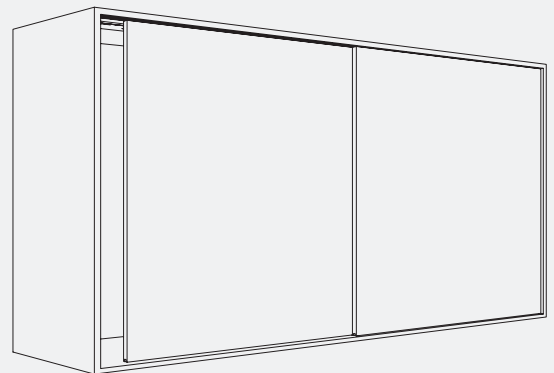


Installation examples

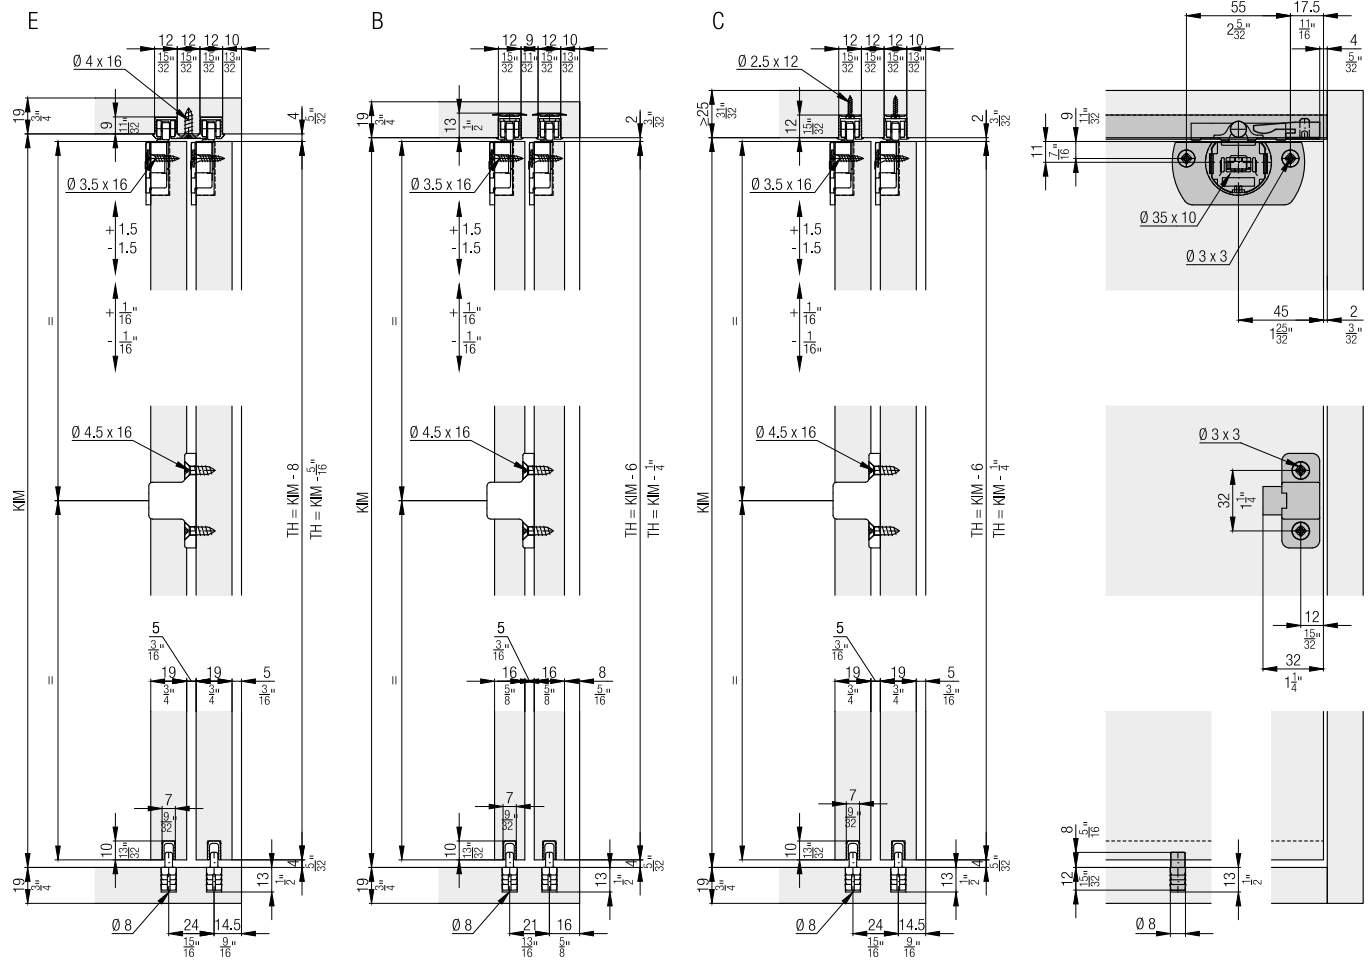

**Set for 2 wooden doors up to 15 kg (33 lbs.),
with height adjustment**

	No.
Hawa Clipo 15 H IS, for 2 doors	053.3115.071


Set consisting of:

		053.3115.071	No.
	Running gear, plastic, anthracite	4	053.3114.071
	Stopper, plastic, gray	2	053.3080.071
	Track support clip, plastic, gray	2	053.3087.001
	Housing, plastic, anthracite	4	053.3112.001
	Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated	8	766.6052.100
	Door follower, plastic, anthracite	1	053.3217.071
	Flat countersunk head chipboard screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated	2	600.0000.478
	Bottom guide, plastic, anthracite	2	053.3013.001





**Set for 2 wooden doors up to 15 kg (33 lbs.), without height
adjustment**

	No.
Hawa Clipo 15 H IS, without height adjustment, for 2 doors	053.3115.072


Set consisting of:

		053.3115.072	No.
	Running gear, without height adjustment, plastic, anthracite	4	053.3318.071
	Stopper, plastic, gray	2	053.3080.071
	Track support clip, plastic, gray	2	053.3087.001
	Housing, plastic, anthracite	4	053.3112.001
	Fillister head screw, 3.5x16 mm (5/32"x5/8"), steel, zinc-plated	8	766.6052.100
	Door follower, plastic, anthracite	1	053.3217.071
	Flat countersunk head chipboard screw, 4.5x16 mm (3/16"x5/8"), steel, zinc-plated	2	600.0000.478
	Bottom guide, plastic, anthracite	2	053.3013.001


Running tracks

		mm (inch)	No.
	A: Single running track, for press fitting or glueing, aluminum	2,500 (8' 2 7/16")	053.3007.250
		3,500 (11' 5 25/32")	053.3007.350
		6,000 (19' 8 7/32")	053.3007.600
	B: Single running track, with swivel lug, notched on both sides, aluminum (not for hard wood/MDF)	2,500 (8' 2 7/16")	053.3008.250
		3,500 (11' 5 25/32")	053.3008.350
	B: Single running track, with swivel lug, aluminum (not for hard wood/MDF)	6,000 (19' 8 7/32")	053.3008.600
	C: Single running track, notched on both sides, aluminum, pre-drilled	2,500 (8' 2 7/16")	053.3009.250
		3,500 (11' 5 25/32")	053.3009.350
	C: Single running track, aluminum, pre-drilled	6,000 (19' 8 7/32")	053.3009.600
	D: Single running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	053.3035.250
		3,500 (11' 5 25/32")	053.3035.350
		6,000 (19' 8 7/32")	053.3035.600
	E: Double running track, aluminum, pre-drilled, only for 19 mm (3/4") doors	2,500 (8' 2 7/16")	053.3315.250
	E: Double running track, aluminum, pre-drilled, only for 19 mm (3/4") doors	3,500 (11' 5 25/32")	053.3315.350
		6,000 (19' 8 7/32")	053.3315.600

Guide tracks

		mm (inch)	No.
	Guide track, groove width 7 mm (9/32"), plastic, anthracite	2,500 (8' 2 7/16")	053.3012.250
		3,500 (11' 5 25/32")	053.3012.350
		6,000 (19' 8 7/32")	053.3012.600

Guide tracks 4-point guidance

		mm (inch)	No.
	Single guide track, for glue fixing, aluminum, anodized	6,000 (19' 8 7/32")	053.3296.600

Components 4-point guidance

		No.
	Bottom guide Hawa Clipo IS/ Hawa Regal C 16, plastic, anthracite	040.3124.071
	Stopper guide track, plastic, grey	053.5094.071

Door centering


	No.
Door centering, plastic, anthracite, for 2 doors	053.3207.071

	053.3207.071	No.
Set consisting of:		
	Housing door centering, plastic, anthracite	2 053.5014.001
	Pin door centering, plastic, anthracite	2 053.0171.001
	Rubber buffer, plastic, grey	1 025.0107.001


Accessories

		No.
	Housing Hawa Clipo 15, press-fit, plastic, anthracite	083.3009.001
	Track cleaner, plastic, red	040.3142.071


Further installation examples

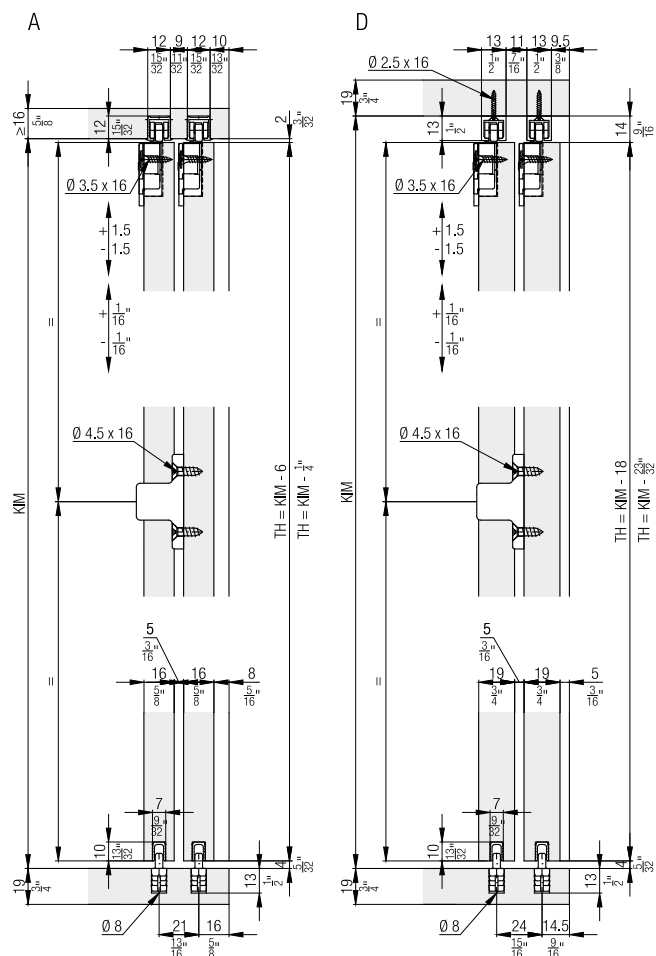


Calculations

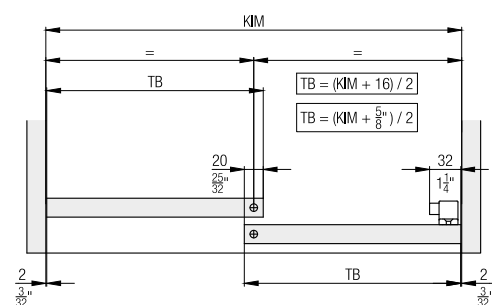


4 point guidance

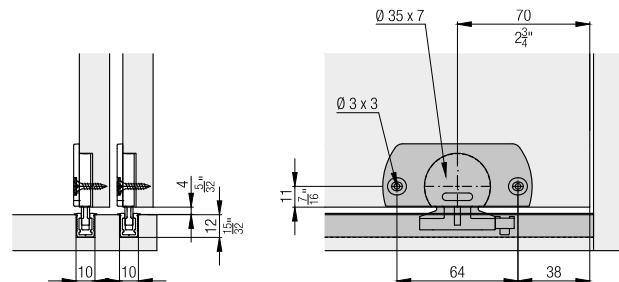


Housing for press-fitting



Door centering

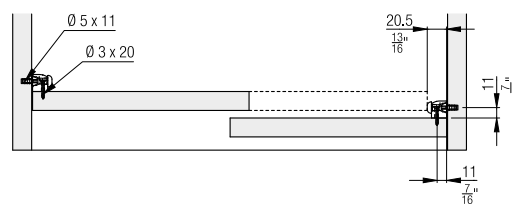

Notched track



Accessories

– Straightening fitting from page 327

Planning/execution

Further information about the product can be found on www.hawa.com.