


Pocket system for pivoting and lateral sliding in of wooden doors up to 15 kg (33 lbs.). Uniform, flush front design with even gap pattern for handle-less cabinet designs.

Product highlights

- Productivity** Easy installation thanks to high degree of pre-assembly with intuitive adjustment
- Comfort** Ergonomic, smooth movement – optimized for base units and composed cabinets
- Aesthetics** Cabinet designs without handle – the technology remains invisible



Technical specifications

- 4–15 kg (9 to 33 lbs.)
- 600–1400 mm (1' 11 5/8" to 4' 7 1/8")
- 350–700 mm (1' 1 25/32" to 2' 3 9/16")
- 18–26 mm (23/32" to 1 1/32")

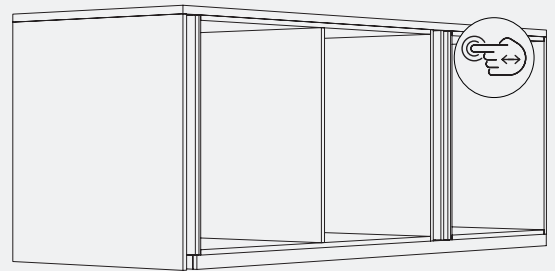



Installation examples

Base unit door striking against the top and bottom cabinet sections

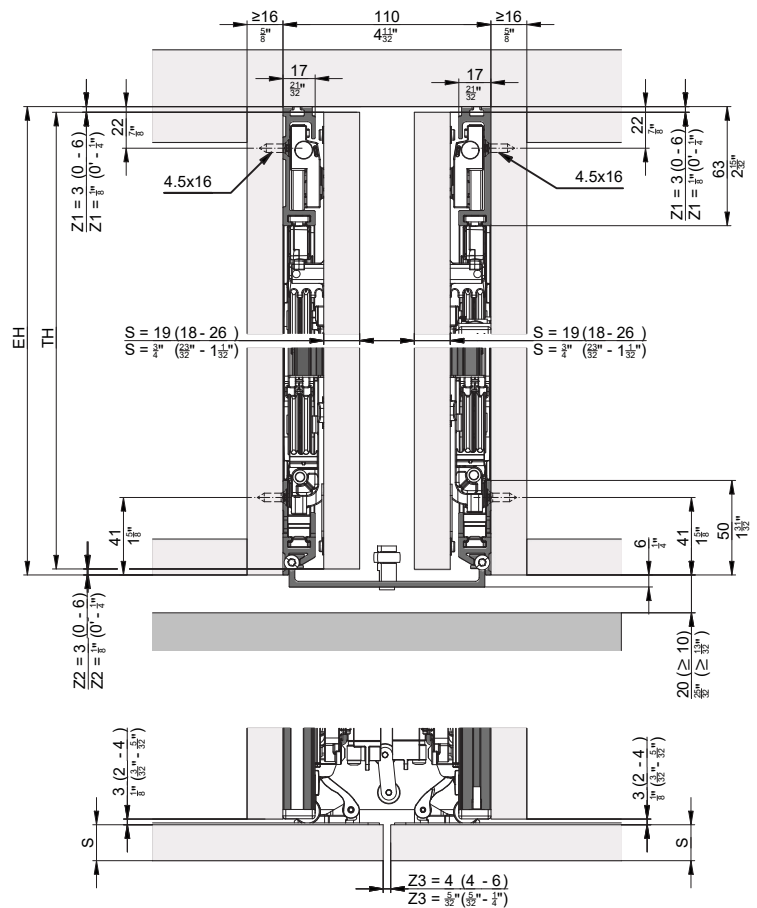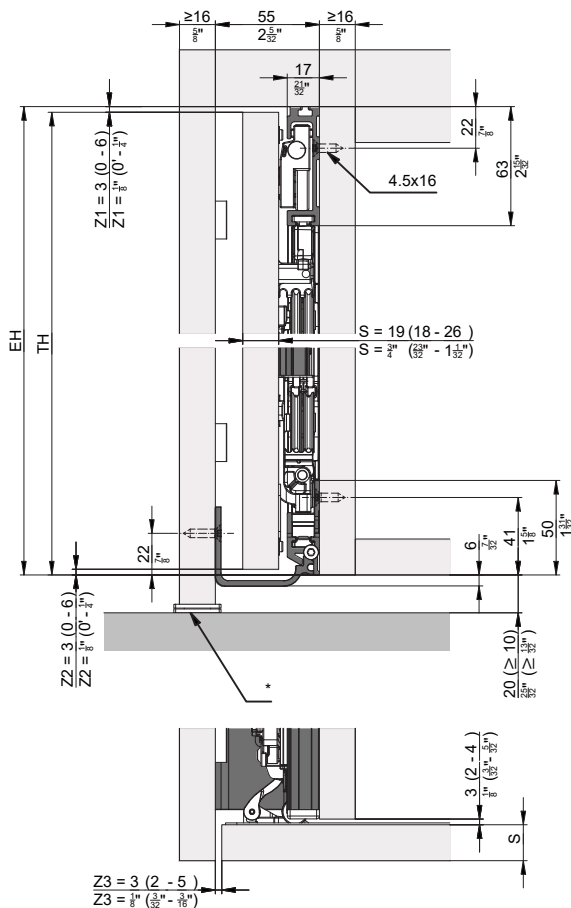

* Recommendation: Use adjustable foot

Components required for one cabinet



Hawa Concepta III V2 15 Push, left

	No.
Hawa Concepta III V2 15 Push/Pull, basic set, left, including upright	53520
Hawa Concepta III V2 15 Push, slide-in set, left	53522

Hawa Concepta III V2 15 Push, right

	No.
Hawa Concepta III V2 15 Push/Pull, basic set, right, including upright	53521
Hawa Concepta III V2 15 Push, slide-in set, right	53523

Weight and door size ratio calculations

The maximum weight must be adapted depending on the door size ratio.

		Door width in mm							
		350	400	450	500	550	600	650	700
Door height mm	1400	15	15	15	15	15	15	15	15
	1350	15	15	15	15	15	15	15	15
	1300	15	15	15	15	15	15	15	14
	1250	15	15	15	15	15	15	14	14
	1200	15	15	15	15	15	14	14	13
	1150	15	15	15	15	14	14	13	12
	1100	15	15	15	15	14	13	12	12
	1050	15	15	15	14	14	12	12	11
	1000	15	15	14	14	13	12	11	11
	950	15	15	14	13	12	11	11	10
	900	15	14	13	12	12	11	11	10
	850	14	13	12	12	11	10	10	9
	800	13	12	11	11	10	9	9	9
	750	12	11	11	10	9	8	8	8
	700	11	10	10	9	8	8	7	7
	650	10	9	8	8	7	7	-	-
	600	9	8	7	7	-	-	-	-
		Door weight in kg							

		Door width in inch							
		1' 1 ¹ / ₈ "	1' 3 ¹ / ₄ "	1' 5 ¹ / ₈ "	1' 7 ¹ / ₈ "	1' 9 ¹ / ₈ "	1' 11 ¹ / ₈ "	2' 1 ³ / ₈ "	2' 3 ¹ / ₈ "
Door height in inch	4' 7 ¹ / ₈ "	33	33	33	33	33	33	33	33
	4' 5 ¹ / ₈ "	33	33	33	33	33	33	33	33
	4' 3 ¹ / ₈ "	33	33	33	33	33	33	33	31
	4' 1 ¹ / ₈ "	33	33	33	33	33	33	31	31
	3' 11 ¹ / ₈ "	33	33	33	33	33	31	31	29
	3' 9 ¹ / ₈ "	33	33	33	33	31	31	29	12
	3' 7 ¹ / ₈ "	33	33	33	33	31	29	26	26
	3' 5 ¹ / ₈ "	33	33	33	31	31	26	26	24
	3' 3 ¹ / ₈ "	33	33	31	31	29	26	24	24
	3' 1 ¹ / ₈ "	33	33	31	29	26	24	24	10
	2' 11 ¹ / ₈ "	33	31	29	26	26	24	24	22
	2' 9 ¹ / ₈ "	31	29	26	26	24	22	22	20
	2' 7 ¹ / ₈ "	29	26	24	24	22	20	20	20
	2' 5 ¹ / ₈ "	26	24	24	22	20	18	18	18
	2' 3 ¹ / ₈ "	24	22	22	20	18	18	15	15
	2' 11 ¹ / ₈ "	22	20	18	18	15	15	-	-
	1' 11 ¹ / ₈ "	20	18	15	15	-	-	-	-
		Door weight in lbs.							


Hawa Configurator

www.hawa.com/configurator →

List of individual parts, which are included in the sets

Set for 1 pivot /slide-in door up to 15 kg (33 lbs.)

	No.
Hawa Concepta III V2 15 Push/Pull, basic set, left, including upright	53520
Hawa Concepta III V2 15 Push/Pull, basic set, right, including upright	53521



		53520	53521	No.
Set consisting of:				
	Slot nuts for hinge attachment, plastic, black	2	2	30686
	Mounting plate for hinge with height adjustment, steel, nickel-plated	1	1	52616
	Concealed hinge, with soft closing mechanism and closing spring, steel, nickel plated	2	2	52621
	Screw set for concealed hinges, 4 screws 4x16 mm ((5/32"x5/8")), 2 door stop buffers	1	1	53555
	Profile for magnetic guide, with double-sided adhesive tape, steel, black, L=730 mm (2' 4 3/4")	1	1	30983
	Euro screw, 6x13 mm (1/4"x 1/2"), steel, black, set of 3 pieces	1	1	53562
	Bottom guide track left, aluminum, anodized, L= 770 mm (2' 6 5/16")	1		53546
	Running track top left, aluminum, anodized, L= 770 mm (2' 6 5/16")	1		53548
	Countersunk head screw for running track adapter, 4.5x16 mm (5/32"x5/8"), set of 16 pieces, incl. T20	1	1	31585
	Upright profile, for door height 600–1400 mm (1' 11 5/8"–4' 7 1/8"), aluminum, anodized, L= 1174 mm (3' 10 7/32")	1	1	53551
	Bottom guide track right, aluminum, anodized, L= 770 mm (2' 6 5/16")		1	53547
	Top running track right, aluminum, anodized, L= 770 mm (2' 6 5/16")		1	53549

Suitable slide-in set

	No.
Hawa Concepta III V2 15 Push, slide-in set, left	53522
Hawa Concepta III V2 15 Push, slide-in set, right	53523

		53522	53523	No.
Set consisting of:				
	Slide-in unit Hawa Concepta III V2 15 Push/Pull, left	1		53557
	End stop bracket for push ejector, steel, zinc-plated	1	1	52559
	Push ejector, plastic, black	1	1	53560
	Push-to-open with adapter plate, plastic, black	1	1	30838
	Hawa Concepta III V2 Pull set of cover caps, for left-hand stop, plastic, black	1		52650
	Slide-in unit Hawa Concepta III V2 15 Push/Pull, right		1	53558
	Hawa Concepta III V2 Pull set of cover caps, for right-hand stop, plastic, black		1	52651


Cabinet connecting parts

		mm (inch)	No.
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top and bottom	560 (1' 10 1/16'')	31005
	Connector set 55 mm (2 5/32''), exterior connection to cabinet, top	560 (1' 10 1/16'')	31430
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, top	500 (1' 7 11/16'')	31006
	Connector set 110 mm (4 11/32''), for two pivot/slide-in doors, bottom	500 (1' 7 11/16'')	31246
	Connector 110 mm (4 11/32''), for two pivot/slide-in doors, bottom (for installation in front of fixed plinth)	26 (1 1/32'')	31007
	Connector clips, exterior connection to cabinet, bottom, 2 pieces		53554

Guides

	No.
	25680

Accessories

	No.
	13164
	19931

Automatic shut-off device

In order to ensure that electrical devices are safely shut off when doors are closed, we recommend the Hawa-specific SafetyBox from Halemeier, which is suitable for the entire Hawa Concepta III family.
www.halemeier.de

Straightening fitting

→ Details under accessories from page 307

Aluminum, black anodized

	No.
Straightening fitting for doors 1215–1775 mm (3' 11 27/32'–5' 9 27/32''), aluminum, black anodized, can be shortened for doors smaller than 1215 mm (3' 11 27/32''), set of 2 pieces	056.3192.076



Hawa Straightening fitting

Aluminum, black anodized
(with cover caps)






Further installation examples


Base unit without base panel

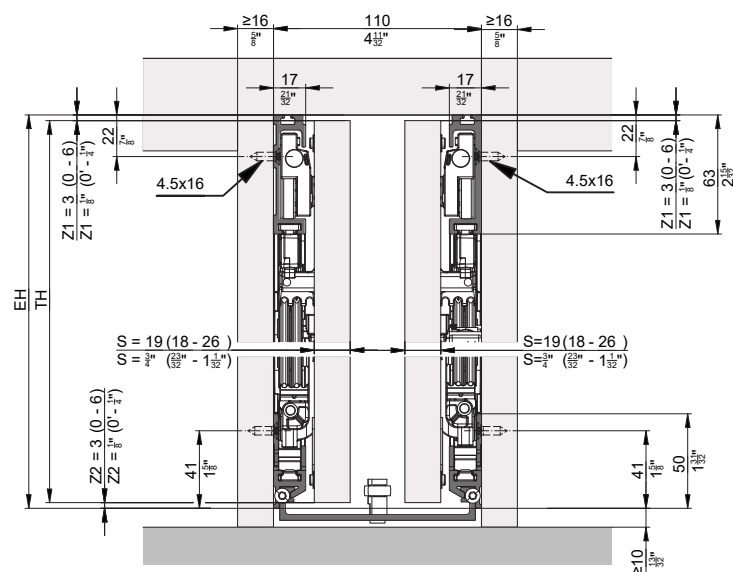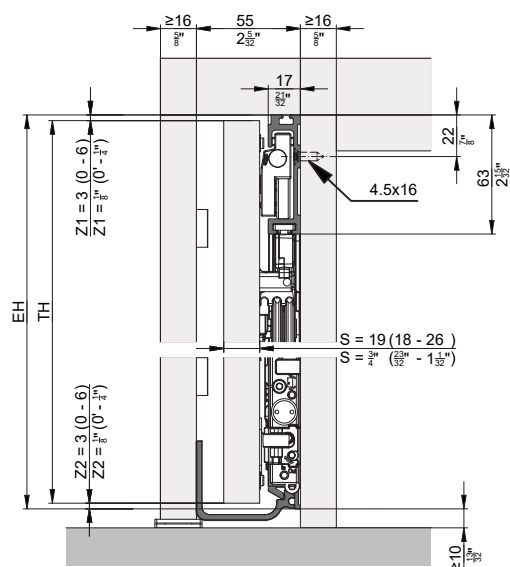


Composed cabinet

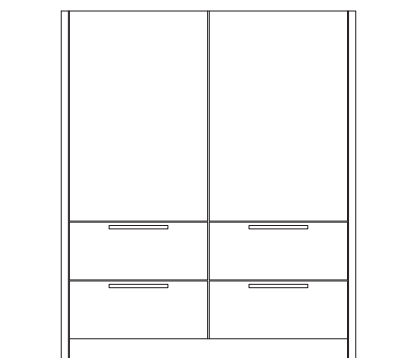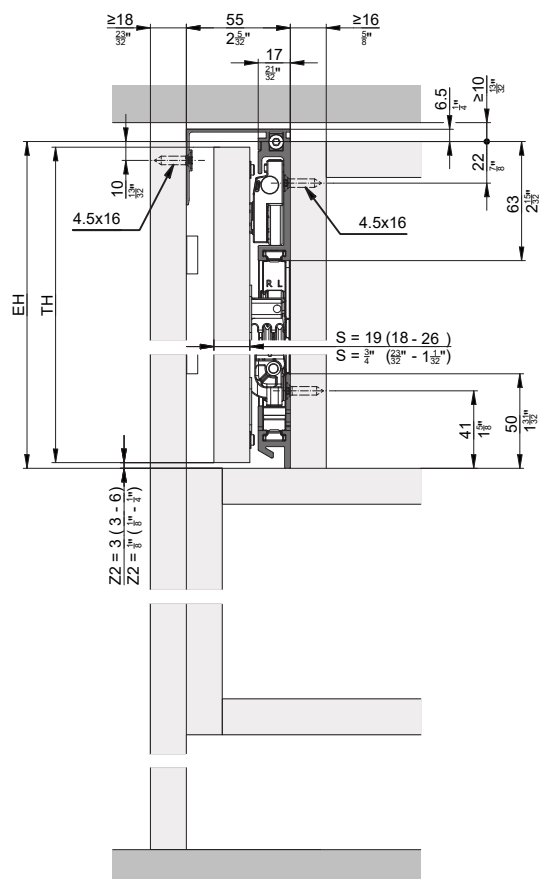

Inlaid doors

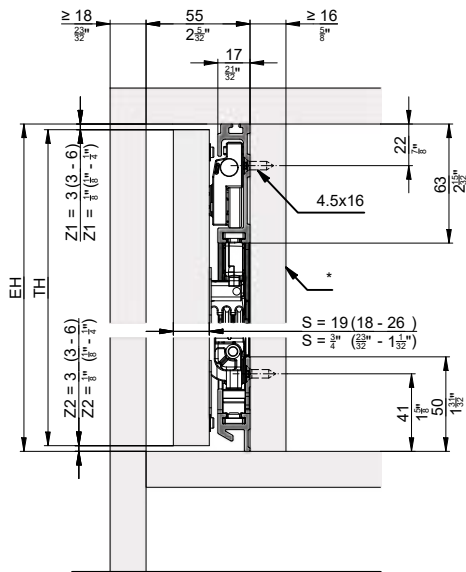


* removable

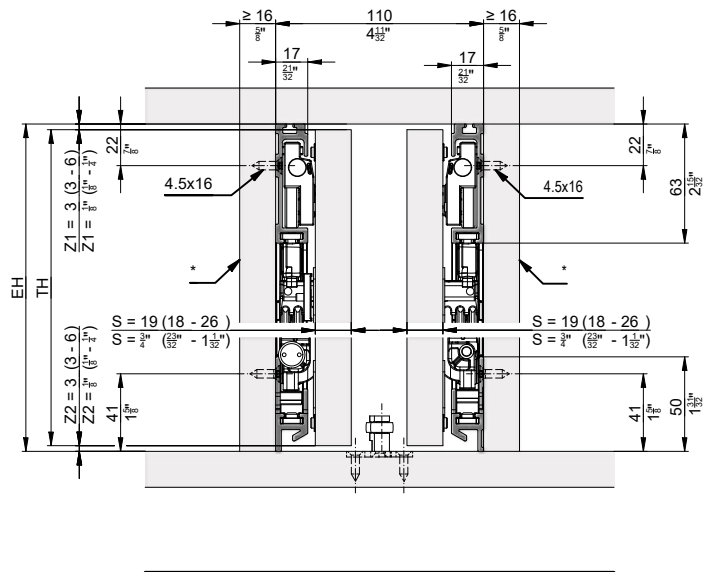


Hardware depth calculation

Door flush with outer face

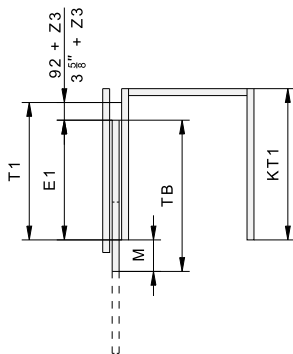


	mm	Inch
T1	≥ 414	$\geq 1'4\frac{5}{16}$

	mm	Inch
T1	$TB + 92 + Z3 - M$	$TB + 3\frac{5}{8} + Z3 - M$
E1	$TB - M$	$TB - M$
M	$\geq S+3$ $\leq TB-320$	$\geq S + \frac{1}{8}$ $\leq TB - 1\frac{19}{32}$



Protruding door

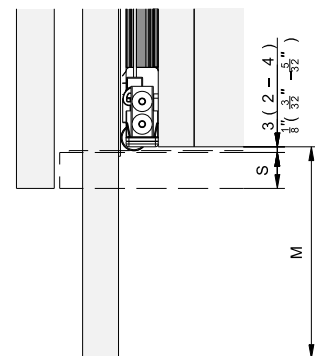

Instructions

Left-hand installation



Right-hand installation



Left-hand adjustment



Right-hand adjustment



Connector



Videos

Installation



Adjustment

